



■ AC Plug Type

AC plug type	2 pin Euro	2 pin USA	2 Pin China	3 pin UK	2 pin AU	2 pin JP	2 pin KR	2 pin IN	3 pin South Africa	Interchangeable
Shape No.	EU	US	CN	UK	AU	JP	KR	IN	/	yes

■ Features

- Universal AC input Full range
- 2 pole US, EU, AU/NZ, EK, JP, CN, IN and 3 pole UK plug, Class II power unit
- No load power consumption < 0.1W
- Energy efficiency Level VI
- Comply with EISA 2007 / DoE and NRCan
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Wide range working temperature



■ Applications

- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipment



■ Description

KRE24i is a highly reliable, 24W wall-mounted style single-output interchangeable industrial adaptor series. This product is a class II power unit (no FG), equipped with standard AC power plug, adopting the input range from 90VAC to 264VAC. The entire series supplies different models with output voltages ranging between 5VDC and 24VDC that can satisfy the demands for various types of consumer electronic devices.

■ Mechanical Characteristics

- see below Dimension Diagrams
- Weight: 130g

■ Characteristics

Input:

AC Input Voltage Rating

100 to 240VAC

AC Input Voltage Range

90 to 264VAC

AC Input Frequency

47 to 63Hz

Input Current

0.66A (RMS) maximum at 120VAC 0.25A (RMS) maximum at 240VAC

Leakage Current

0.25A maximum at 264VAC

Inrush Current (Cold Start at ambient 25° C)

30A for 120VAC and maximum load 60A for 240VAC at maximum load

Input Power Saving

0.1W maximum at no load

Output: Efficiency

Meet energy saving efficiency level VI.

Hold-up Time

10mS minimum at 120VAC and maximum load

Short-Circuit Protection

Auto restart

Environmental Temperature

Operation 0 to +40° C

Non-operation -40 to +85° C

Humidity 10-90% non-condensing

Emissions

Complies with FCC Class B Complies with EN55032 Class B

Immunity

AN/NZS CISPR22

EN55024 J55022(H22)

EN61000-4-2 Level EN61000-4-3 Level

EN61000-4-4 Level EN61000-4-5 Level

EN61000-4-6 Level EN61000-4-8 Level

EN61000-4-11 Level EN61000-3-2 Level

EN61000-3-3 Level

GB9254+GB1762

Dielectric Withstand (Hi-pot) Test Primary to Secondary:

3500V AC for 1 min., 10mA

Primary to F.G.: 1500V AC for 1 min., 10mA

DC Output Connector

2.1 x 5.5mm Center Positive+ Standard or equivalent,


Or see *KRE-connectors-Spec.pdf*

Output Cable

1.5 meter (4.92 feet), UL2468, from 24-18AWG guage or equivalent

Mating Connector

Equivalent

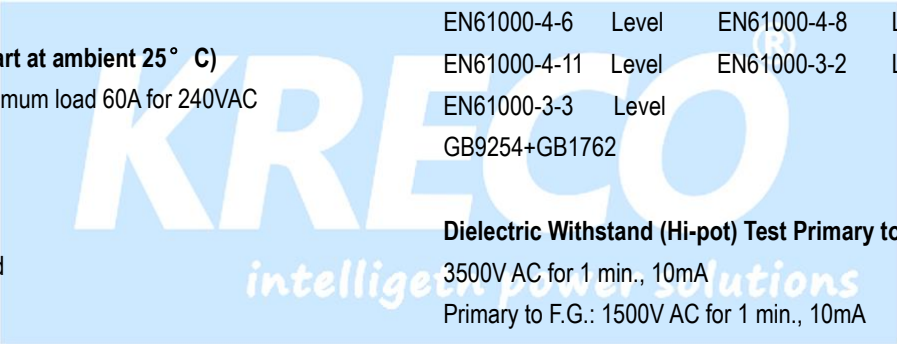


■ Output Specifications

KRECO P/N (see note)	DC Output Voltage	Load		Output Power	Safety Approvals	Energy Savin g Level	Standards
		Min	Max				
KRE024SPS-xxxxyyzf or KRE-xxxxyyyl or LY024SPS-xxxxyyzf	5.0- 8.9V	0.01A	3.0A	18W max	UL/CUL/FCC,CE/GS/EMC,TUV/BS,RCM ,CCC/CQC,EK,PSE	V&VI	EN/IEC/UL62368
	9.0- 14.9V	0.01A	2.0A	24W max	UL/CUL/FCC,CE/GS/EMC,TUV/BS,RCM ,CCC/CQC,EK,PSE	V&VI	EN/IEC/UL62368
	15.0- 24.0V	0.01A	1.6A	24W max	UL/CUL/FCC,CE/GS/EMC,TUV/BS,RCM ,CCC/CQC,EK,PSE	V&VI	EN/IEC/UL62368
	5.0- 8.9V	0.01A	3.0A	18W max	UL/CUL/FCC,CE/GS/EMC,TUV/BS,RCM Interchangeable	V&VI	EN/IEC/UL62368
	9.0- 14.9V	0.01A	2.0A	24W max	UL/CUL/FCC,CE/GS/EMC,TUV/BS,RCM Interchangeable	V&VI	EN/IEC/UL62368
	15.0- 24.0V	0.01A	1.6A	24W max	UL/CUL/FCC,CE/GS/EMC,TUV/BS,RCM Interchangeable	V&VI	EN/IEC/UL62368



■ Dimension Diagram for KRE24I

Unit: mm

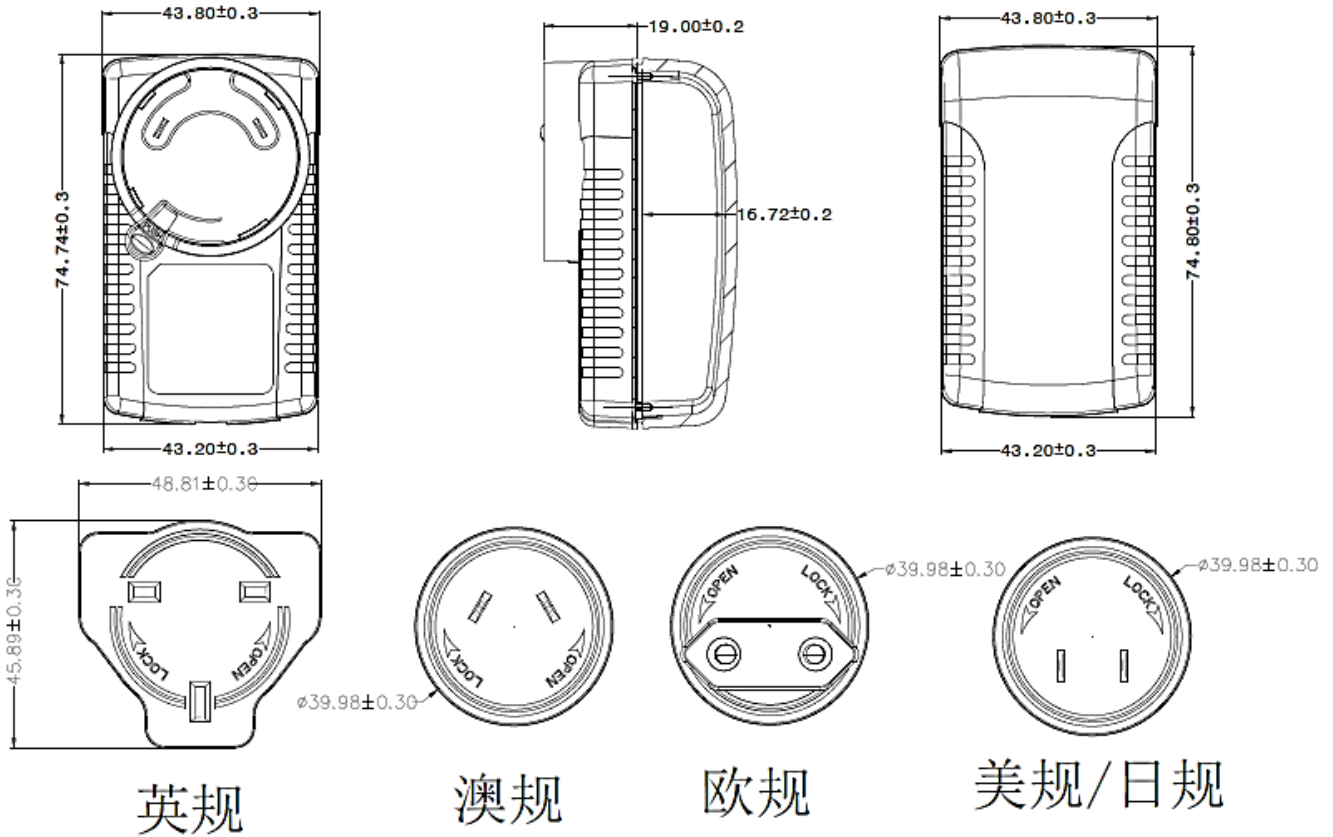

intelligent power solutions

- (1) I for Interchangeable version, normally include EU, UK, US, AU version plugs, more plug type could be re-designed, or added to production order.
- (2) xxx for Output voltage and yyy for output current, what you are going to order, please must specify to sales.
- (3) Safety model number differs from the order number, part number, and shape number as per respective OEM/ODM factories.

Kreco is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.kreco.com.cn for the most up-to-date specifications and contact information.